



Communication & Control

Hi-Fi and Stereo Cables

PVC

UL SPT-1, RoHS Compliant, 200 Volt, 300 Volt

CHARACTERISTICS

HI-FI AND STEREO CABLE

OPERATING TEMPERATURE

- -20°C to 80°C


VOLTAGE RATING

- 200 Volt

PRODUCT DESCRIPTION

- Conductor: Stranded tinned copper
- Insulation: colour-coded PVC, conductors twisted with extra tight layer

Specification Information

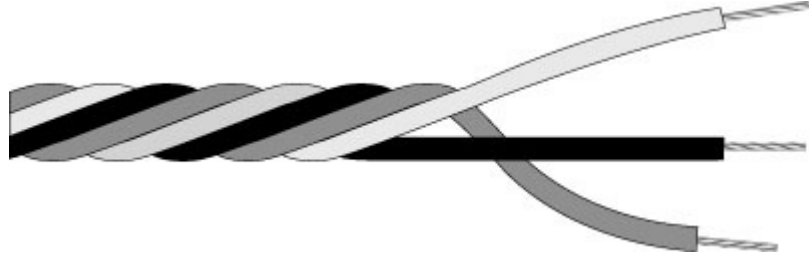

AVAILABILITY

- 100 ft (30.5m), 500 ft (152m), 1000 ft (305m) put-ups

HI-FI AND STEREO CABLE 80°C 200V PVC UNSHIELDED				
30 AWG (0.05mm ²), 7/38 (7x0.10mm), Insulation Thickness: 0.010" (0.25mm)				
Alpha Part No	No. of Cond.	Diameter		Colour code
		Inches	mm	
▲ 1115	2	0.06	1.5	Black & Red
▲ 1116	3	0.07	1.8	Black, Red & White

CHARACTERISTICS

SPEAKER CABLE

OPERATING TEMPERATURE

- -20°C to 80°C

VOLTAGE RATING

- 300 Volt

PRODUCT DESCRIPTION

- Conductor: Stranded bare copper, 24 AWG 1 conductor tinned copper and 1 conductor bare copper on 18 AWG

UNSHIELDED				
32 AWG (0.034m ²), 7/40 (7x0.08mm), Insulation Thickness: 0.010" (0.25mm)				
Alpha Part No	No. of Cond.	Diameter		Colour code
		Inches	mm	
▲ 1101	3	0.05	1.3	Black, Red & White
▲ 1102	4	0.06	1.5	Black, Red, White & Green

SPECIFICATIONS

- UL SPT-1 (Part Number 1944)

SPEAKER CABLE 80°C 300V UL SPT-1					
Part 1:					
Alpha Part No	No. of Cond.	Conductor		Insulation Thickness	
		AWG	Strand	Inches	mm
▲▲ 1944	2	24	7/32	0.016	0.41
Part 2					
Alpha Part No	Diameter		Stock Code		
	Inches	mm			
▲▲ 1944	0.05 x 0.12	1.4 x 3.0	Black		

AVAILABILITY

- 100 ft (30.5m), 500 ft (152m), 1000 ft (305m) put-ups

MINIATURE SHIELDED CABLE						
28 AWG (0.09mm ²), 7/36 (7x0.13mm), Insulation Thickness: 0.010" (0.25mm)						
Alpha Part No	No. of Cond.	Jacket Thickness		Diameter		Colour code
		Inches	mm	Inches	mm	
1120	2	0.010	0.25	0.11	2.7	Black & Red
1121	3	0.010	0.25	0.12	2.9	Black, Red & White
1122	4	0.010	0.25	0.13	2.9	Black, Red, White & Green

CHARACTERISTICS

MINIATURE SHIELDED CABLE

OPERATING TEMPERATURE

- -20°C to 80°C

VOLTAGE RATING

- 200 Volt

COLOUR DESCRIPTION

- Jacket colour: clear

PRODUCT DESCRIPTION

- Conductor: Stranded tinned copper
- Insulation: colour-coded PVC
- Shield: braided tinned copper

AVAILABILITY

- 100 ft (30.5m), 500 ft (152m), 1000 ft (305m) put-ups
- ▲ 100 ft (30.5m), 1000 ft (305m) put-ups
- ▲▲ 1000 ft (305m) put-ups



